



Ball Bearings


JA2 (Light-duty)

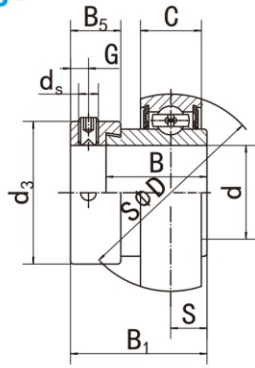


JA2



JA2-G



JA2-G₂



H type seal (Standard)



J type seal (Optional)

Bearing NO.	Dimensions (mm / in.)											Dynamic load ratings (N)	Static load ratings (N)	Weight (kg)
	d	D	B ₁	B	C	S	d _s	G	F	B ₅	d ₃			
JA201	12	40	28.6	19.1	13	6.5	M6X1	4.8	3.4	13.5	28.6	9600	4600	0.13
201-8	1/2	1.5748	1.126	0.752	0.5118	0.256	1/4-28UNF	0.189	0.134	0.531	1.126			
JA202	15	40	28.6	19.1	13	6.5	M6X1	4.8	3.4	13.5	28.6	9600	4600	0.11
202-9 202-10	9/16 5/8	1.5748	1.126	0.752	0.5118	0.256	1/4-28UNF	0.189	0.134	0.531	1.126			
JA203	17	40	28.6	19.1	13	6.5	M6X1	4.8	3.4	13.5	28.6	9600	4600	0.10
203-11	11/16	1.5748	1.126	0.752	0.5118	0.256	1/4-28UNF	0.189	0.134	0.531	1.126			
JA204	20	47	31.0	21.5	15	7.5	M6X1	4.8	4.2	13.5	33.3	12800	6650	0.16
204-12	3/4	1.8504	1.22	0.8465	0.5906	0.295	1/4-28UNF	0.189	0.165	0.531	1.311			
JA205	25	52	31.0	21.5	15	7.5	M6X1	4.8	4.3	13.5	38.1	14000	7850	0.20
205-13	13/16	2.0472	1.22	0.8465	0.5906	0.295	1/4-28UNF	0.189	0.169	0.531	1.5			
205-14	7/8													
205-15	15/16													
205-16	1													
JA206	30	62	35.7	23.8	18	9.0	M8X1	6.0	5	15.9	44.5	19500	11300	0.31
206-17	1-1/16	2.4409	1.4060	0.937	0.7087	0.354	5/16-24UNF	0.236	0.197	0.626	1.752			
206-18	1-1/8													
206-19	1-3/16													
206-20	1-1/4													
JA207	35	72	38.9	25.4	19	9.5	M8X1	6.8	5.6	17.5	55.6	25700	15300	0.43
207-20	1-1/4	2.8346	1.5310	1	0.748	0.374	5/16-24UNF	0.268	0.220	0.689	2.189			
207-21	1-5/16													
207-22	1-3/8													
207-23	1-7/16													
JA208	40	80	43.7	30.2	22	11.0	M8X1	6.8	5.9	18.3	60.3	29500	18100	0.62
208-24	1-1/2	3.1496	1.7210	1.189	0.8661	0.433	5/16-24UNF	0.268	0.232	0.72	2.374			
208-25	1-9/16													
JA209	45	85	43.7	30.2	22	11.0	M8X1	6.8	6.1	18.3	63.5	31600	20600	0.66
209-26	1-5/8	3.3465	1.7210	1.189	0.8661	0.433	5/16-24UNF	0.268	0.240	0.72	2.5			
209-27	1-11/16													
209-28	1-3/4													
JA210	50	90	43.7	30.2	22	11.0	M8X1	6.8	6.5	18.3	69.9	35000	23200	0.75
210-29	1-13/16	3.5433	1.721	1.189	0.8661	0.433	5/16-24UNF	0.268	0.256	0.72	2.752			
210-30	1-7/8													
210-31	1-15/16													
210-32	2													
JA211	55	100	48.4	32.5	24	12.0	M10X1	8.0	7	20.7	76.2	43500	29200	1.03
211-32	2	3.937	1.906	1.2795	0.9449	0.472	3/8-24UNF	0.315	0.276	0.815	3			
211-33	2-1/16													
211-34	2-1/8													
211-35	2-3/16													
JA212	60	110	53.1	37.2	27	13.5	M10X1	8.0	7.4	22.3	84.2	47700	32900	1.37
212-36	2-1/4	4.3307	2.091	1.4646	1.063	0.532	3/8-24UNF	0.315	0.291	0.878	3.315			
212-37	2-5/16													
212-38	2-3/8													
212-39	2-7/16													